
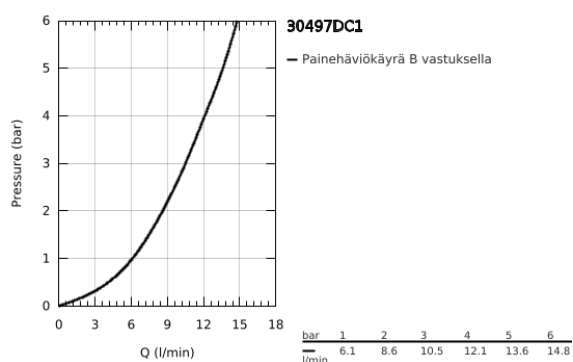


## 30 497 DC1 EUROSMART KEITTIÖHANA

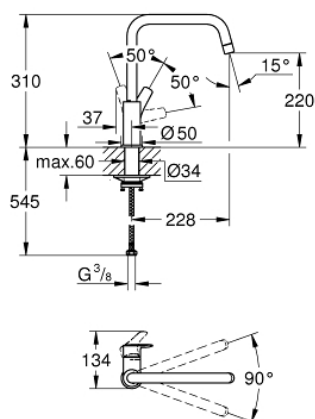

### TUOTESELOSTE

- Colour: Supersteel
- Korkea juoksuputki
- Yksi asennusreikä
- GROHE Long-Life -viimeistely
- GROHE SilkMove 28 mm:n keraaminen säätöosa
- Integroitu lämpötilanrajoitin
- Poresuutin
- Säädettävä virtaaman rajoitus
- Kääntyvä juoksuputki
- Kääntyvyys 90°
- Joustavat liitosletkut 3/8"
- 
- Vähimmäispaine 1,0 baaria
- Professional Edition

This exploded view diagram illustrates the components of a kitchen faucet assembly. The main faucet body is shown on the left, with a curved spout. A curved arrow labeled '4' indicates the rotation of the handle. To the right, a separate assembly is shown, consisting of a handle (1), a decorative cap (2), and a decorative ring (3). Below the spout, a series of components are shown in an exploded view, including a decorative cap (5), a decorative ring (6), and a series of O-rings and seals. The diagram is labeled with numbers 1 through 6, corresponding to the parts listed in the table.

- 1: Kahva (Tilausnro. 48531DC0)
- 2: Kasetti (Tilausnro. 46963000)
- 3: flow control (Tilausnro. 101044DC00)
- 4: Turvarengas (Tilausnro. 4826600M)
- 5: Akselin kiinnityssarja (Tilausnro. 48384000)
- 6: Tukilevy (Tilausnro. 05334000)